



HIGH EFFICIENCY CIRCULATION PUMP

User's Manual

Read this manual carefully before installation. The product can not be used for medical industry which have the potential to cause personal injury, also can not be used for pumping other liquids than water.

--	--



7 Trouble shooting

Symptom	Likely causes	What to do
The pump is not working	Loose power cable connection	Make sure the power cable is connected securely and firmly
	Control electronics damaged	Replace the control box
	The impeller, motor may be wound by fibers or jammed with sundries	Clean the fibers and sundries
Noise within system or pump casing	Impurities within pump	Dismantle the pump and clean the impurities
	Air or gas within system or pump casing	Exhaust the air or gas
	Intake valve is closed	Open the valve
The pump is working, but not generating any pressure	Air or gas within pipes or pump	Open the valve to make the pump running and meanwhile loosen the connector of the outlet ports to ensure gas emission

In case of failures, the electrical control will react to some of the faults and protect the pump.

The protection code on display panel shows in the following table:

Protection type	Display	Likely causes	What to do
Locked-rotor protection		The rotor is blocked	Disassemble the motor and check if the rotor can rotate normally. If not then clean up the impurities to make the rotor part rotate flexibly
Overvoltage/undervoltage protection		The input voltage is too high or too low	Check if the voltage is within normal range, if not then adjust to normal voltage
Open phase protection		One or more phases of the internal connection circuit is disconnected	Replace the pump
Over current protection		Short circuit of internal connection circuit	Replace the pump

Notes:

- All the figures in this manual are schematic diagrams, and please understand that the electric pumps and accessories you buy may be different from the diagrams in this manual.
- The performance of the product is improved constantly, and all products (including appearance and color, etc.) are subject to physical products; no further notice will be given in case of any change.



Intelligent hot water circulating pump

Warranty Card

Dear Customer:

Thanks for purchasing this product and sincerely hope that you will enjoy more happiness and leisure for your choice.

Now, please read and fill out this Warranty Card carefully. You will obtain reasonable and reliable guarantee and at the same time enjoy high quality service during warranty period as a result.

Pump model : _____

Production batch number: _____

Invoice number: _____

Date of purchasing: _____

Purchased in: _____

User name: _____

Address: _____

Postal code: _____

Seal:

(This card is valid when affixed with the seal of the sales store.)

CONTENTS

1 Introduction	2
2 Profile and dimensions	2
2.1 Model instructions	2
2.2 Model and function overview	2
2.3 Dimensions	3
3 Cautions	4
4 Using environment and installation	4
4.1 Pumped liquids	4-5
4.2 Liquid temperature and ambient temperature	6
4.3 Installation	7
4.4 Control box positions	8
4.5 Electrical connection	9
5 Operation instructions	9
5.1 The control panel	9
5.2 Performance curve	10
5.3 Relationship between electric pump setting and lighted area	11
5.4 Other functions	12
5.5 PWM	12
5.6 Signal connection	12
6 Technical data	13
7 Troubleshooting	14

6 Technical data

Supply voltage	230 V, 50/60 Hz			
Motor protection	Doesn't need external motor protection			
Protection class	IP44			
Insulation class	F			
Relative ambient humidity	Max. 95%			
System pressure	Max. 1.0 MPa, 10 bar			
Suction inlet pressure	Liquid temperature	≤ +75°C	Min. Inlet pressure	0.05bar , 0.005MPa
		+90°C		0.28bar , 0.028MPa
		+110°C		1.08bar , 0.108MPa
EMC Standard	GB 4343.1	GB 4343.2	GB 17625.1	GB 17625.2
Ambient temperature	0°C ~ 40°C			
Surface temperature	Max. +125°C			
Liquid temperature	+2°C ~ +110°C			


5.4 Other functions

No.	Function	Description	Operation
1	Venting	The pump venting function is activated by pressing and holding the operating button (for 3 seconds) and automatically vents the pump. However, this function does not vent the heating system.	
2	Lock/unlock the button	The key lock is activated by pressing and holding the operating button (for 5 seconds) and locks the pump's current settings. It protects against undesired or unauthorised adjustment of the pump.	
3	Manual restart	A manual restart is initiated by pressing and holding the operating button (for 8 seconds) and unlocks the pump as required (e.g. after a long idle time in the summer).	

5.5 PWM

PWM function please contact our technician.

5.6 Signal connection

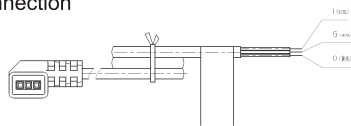

Black: Ground wire (GND)

Red: PWM input (from controller)

Yellow: PWM output (from the pump)



Thank you very much for choosing our company's products. Please read the instructions carefully and save it properly before installation and use.

⚠ Warnings

- Please read the instructions carefully before installation and use.
- The electric pump must be reliably grounded and installed with leakage protection devices before use.
- It is strictly forbidden to touch the electric pump during operation.

⚠ Warning for Children

- It is strictly forbidden for children, incapacitated persons, or person limited in disposing capacity (If have not been taught how to use this product safely and understand the hazards involved) to use this product without supervision by a guardian.

⚠ Electricity Warning

- The electric power system may be used only when it has the safety protection measures specified by the existing provisions of the country where the product is installed.

⚠ Pressure Warning

- The pump system must be able to withstand the maximum pressure of the pump.

⚠ Modification-related Warning

- The manufacturer is not responsible for any consequences caused by the user changing the electric pump or operating the electric pump beyond the operating conditions.


1 Introduction

High Efficiency Circulation Pump (hereinafter called as "electronic pump"). The stator of the motor is completely shielded, and the rotating parts are immersed in clean water, playing an important role in cooling and lubricating during working. The shielding sleeve of the electric pump adopts thin-wall structure to completely shield the internal stator of the motor from water, the traditional mechanical seal structure is eliminated and the leakage problem of conventional water pump is solved.

The rotating parts are made of ceramic bearings and ceramic rotating shafts, which are wear-resisting and lubricated with clean water, can cold down the motor and reduce the noise. The pump will not overload during full head running. It can be generally free from maintenance as long as used correctly.

2 Profile and dimensions

2.1 Model instructions

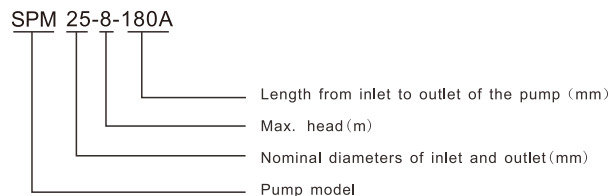

2.2 Profile

Model	Inlet/Outlet diameter mm	Thread	Max flow	Head	Voltage	Frequency	Power	Current				
	m³/h		m	V					Hz	W	A	
SPM20-4-130A	20	G1	2.2	1~4	230	50/60	25	0.3				
SPM25-4-130A	25	G1.5	2.5									
SPM25-4-180A	25	G1.5	2.5									
SPM32-4-180A	32	G2	2.9									
SPM20-6-130A	20	G1	2.9	1~6			230	50/60	45	0.5		
SPM25-6-130A	25	G1.5	3.2									
SPM25-6-180A	25	G1.5	3.2									
SPM32-6-180A	32	G2	3.6									
SPM20-8-130A	20	G1	2.9	1~8					230	50/60	65	0.65
SPM25-8-130A	25	G1.5	3.4									
SPM25-8-180A	25	G1.5	3.6									
SPM32-8-180A	32	G2	4.0									


5.3 Relationship between electric pump setting and lighted area

Electric pump mode is setup with different display areas like below:


Pressing times	Model	Descriptions	Display
0	CS III (Factory Settings)	Constant curve, speed III	
1	AUTO	Adaptive mode	
2	PP I	Proportional pressure curve, speed I	
3	PP II	Proportional pressure curve, speed II	
4	PP III	Proportional pressure curve, speed III	
5	CP I	Constant pressure curve, speed I	
6	CP II	Constant pressure curve, speed II	
7	CP III	Constant pressure curve, speed III	
8	CS I	Constant curve, speed I	
9	CS II	Constant curve, speed II	
10	CS III	Constant curve, speed III	
/	PWM	External control of motor speed	

5.2 Performance curve


SPMXX-4-XXXX

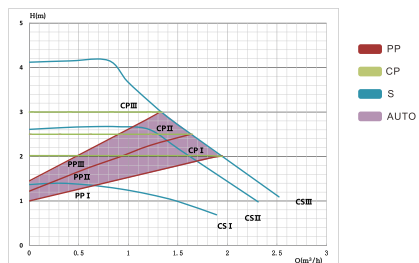

SPMXX-6-XXXX

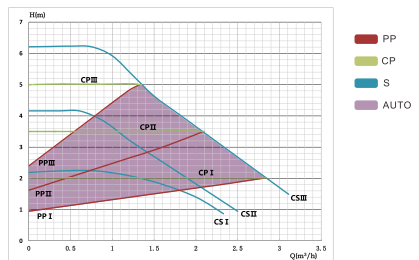


SPMXX-8-XXXX

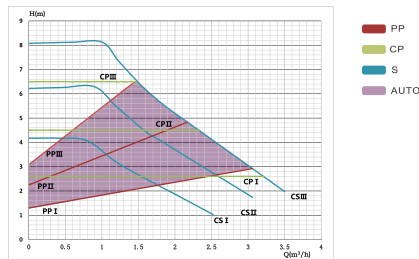


Model	Internally controlled			Externally controlled
	Proportional pressure	Constant pressure	Constant curve	PWM
SPMXX-X-XXXX	I	I	I	PWM
	II	II	II	
	III	III	III	
	AUTO	/	/	

2.3 Dimensions

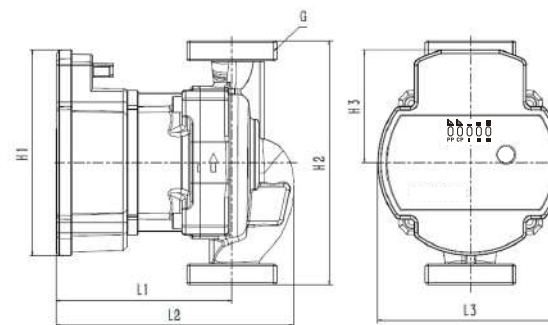

Model	Size (mm)						
	L1	L2	L3	H1	H2	H3	G
SPM20-X-130A	94	127	99	110	130	60	G1
SPM25-X-130A					180		G1.5
SPM25-X-180A							G2
SPM32-X-180A							

3 Cautions




- 3.1 The power supply voltage of the electric pump is single phase 230V, and the frequency is 50/60hz.
- 3.2 Make sure that the pipe system is securely connected before installation and verify that the impurities, soldering leftover and wastes have been cleaned within the pipes.
- 3.3 Make sure the pump is located in dry and ventilation environment to avoid short circuit due to moisture or splashing into the casing, and guarantee its availability to service and replacement.
- 3.4 The protection cover must be added, for the requirement of outdoor installation, while actions must be taken to avoid being splashed and to prevent electric shock risk in indoor installation. Warning: do not install in bathroom to prevent vapor or water or moisture from going into the junction box resulting in electric leakage.
- 3.5 It's strongly suggest that shutoff valves to be installed at inlet and outlet ports for the sake of following pump service and maintenance.
- 3.6 When complete installing the pump, connect the power supply as pilot run and set the speed adjusting switch at max grade to check if the starting is normal. But the pilot running time can not be over 10 seconds so as to avoid idle running influencing working life of the bearing.
- 3.7 When the pump is supplying water to the heating system, do not touch the pump and/or other pipes to avoid burning.
- 3.8 The power plug must be strictly grounded. Securely connect the GND pin of the power plug to the power plug grounded hole. Do not attempt to change the GND plug of the pump.
- 3.9 The striking security caution markings must be set up during pump working to avoid any accident.
- 3.10 The power supply must be firstly disconnected before adjusting pump location or before any action that may touch the pump when the pump is working to avoid any accident.
- 3.11 Regularly check the pump and timely replace in case of any damage.
- 3.12 The power cable can only be replaced with corresponding cords or dedicated components.
- 3.13 In winter, when the environment temperature is below 0℃, the water within the pipes must be exhausted thoroughly if the pump ceases working to avoid pump frost crack.
- 3.14 The heat supply pipes can not be frequently supplemented with non-soft water to avoid the accumulated calcium inside the pipe system that that may block the rotor.

4 Using environment and installation

4.1 Pumped liquids

The conveying medium is the softened water and thin, clean, non-corrosive, non-explosive liquid without solid particles, fiber and mineral oil. The PH is 6.5~8.5.

4.5 Electrical connection

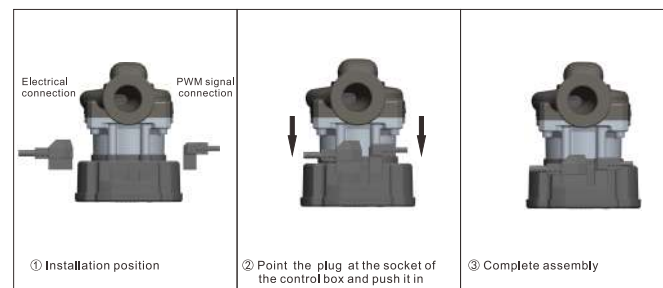


5 Operation instructions

5.1 The control panel




4.4 Control box positions


The following operations can only be completed by qualified personnel.

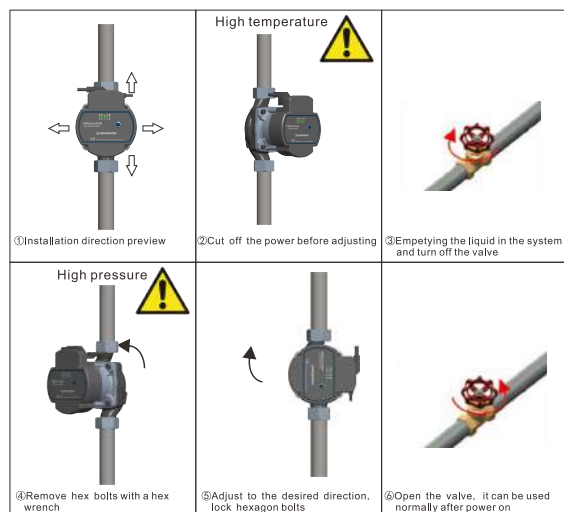

Warning Pumped liquid may be high temperature, high pressure liquid. Before removing the hexagon socket screw, drain the hot water in the system and close the intercepting valve on both sides of the electric pump.

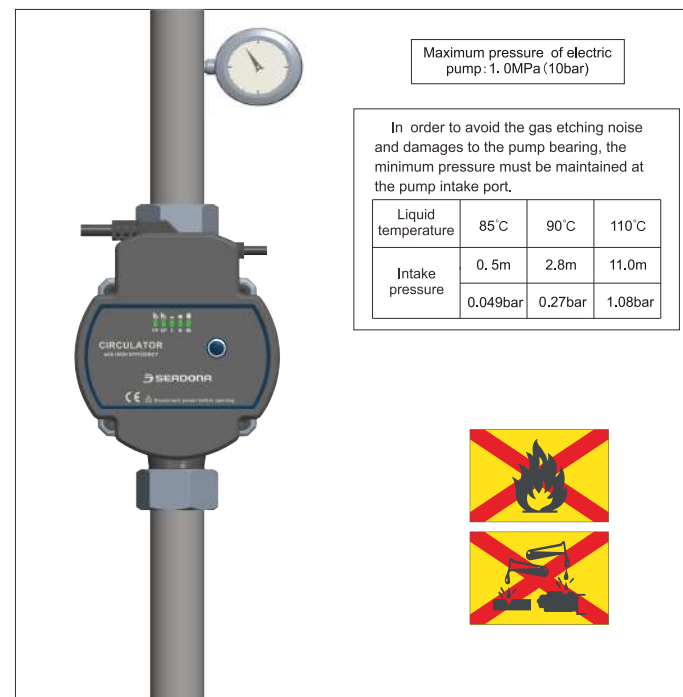

4.2 Liquid temperature and ambient temperature

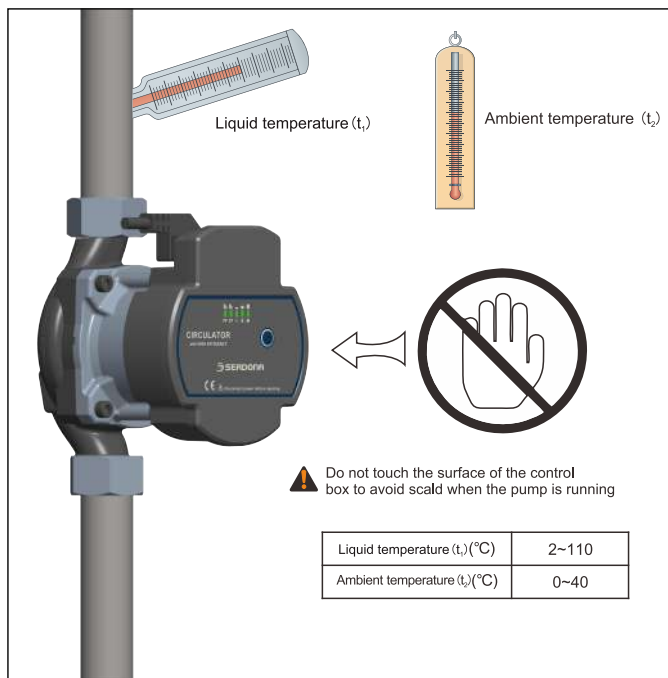

4.3 Installation

The motor shaft must be kept in horizontal direction when installing, the liquid flowing direction in pipe must be same with the arrow marked on pump body.

